


Floor preparation is charged at **\$10/m²** based on the raw measured flooring area, excluding wastage. This covers the standard preparation required to ready the existing subfloor for installation.

Where additional levelling is required, self-levelling compound is charged at **\$120 per bag**, as required. As the condition and level of the existing subfloor cannot be fully determined prior to preparation commencing, **the quantity of levelling compound required cannot be confirmed at quotation stage.** Any bags used will be charged according to the actual quantity required on site.

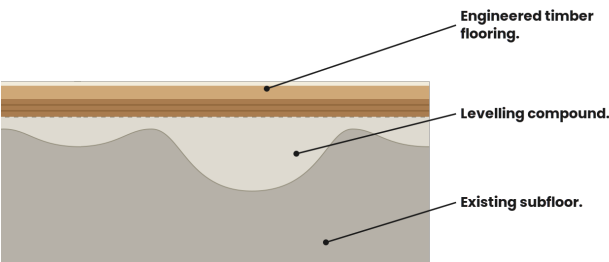

Why tolerance matters.

Engineered timber is rigid, and it will follow the shape of whatever it's laid over. A subfloor outside tolerance can telegraph through the finished floor, put uneven pressure on joins, and lead to movement, gaps, or hollow spots over time.

Levelling compound fills the low points so the whole floor sits on one consistent, flat plane before installation begins.

How floor preparation is priced.



GRINDING

\$10/m² (raw area)

Charged on the raw measured flooring area, excluding wastage. Covers the standard preparation required for installation.



LEVELLING COMPOUND

\$120 per bag, as required

Quantity can't be confirmed until preparation begins on site, so bags are charged according to actual use.




SCOPE

What's included

Grinding, levelling compounds, and smoothing of uneven areas, carried out ahead of installation.


Included in your ATS Design quote.

Grinding is charged at \$10/m² based on the raw measured flooring area and appears as a line item in your quote. Self-levelling compound is billed separately at \$120 per bag, only where required, since the exact quantity can't be confirmed until preparation begins on site.

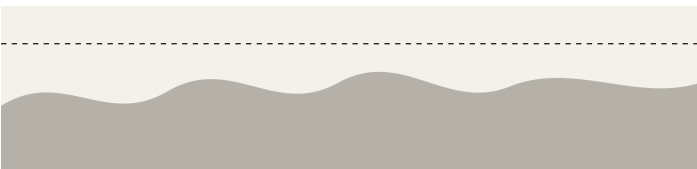

Before preparation

Uneven subfloor, outside the ~3mm over 3m tolerance.

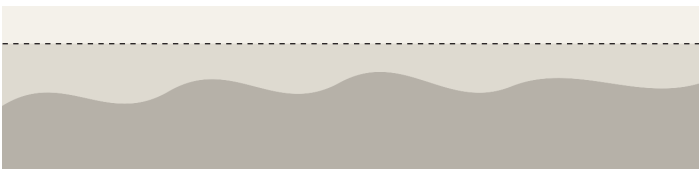

After preparation

Levelled subfloor, ready for flooring installation.